

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 18 TOWNSHIP 14 RANGE 4

DATE: 7-12-03 4-17-08

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison found


METHOD OF ESTABLISHMENT: County: 10-22-98

IN. S.P.C. E ZONE NAD '83

NAME: 14041804

N: 489605.3368(m)

E: 59426.9862(m)

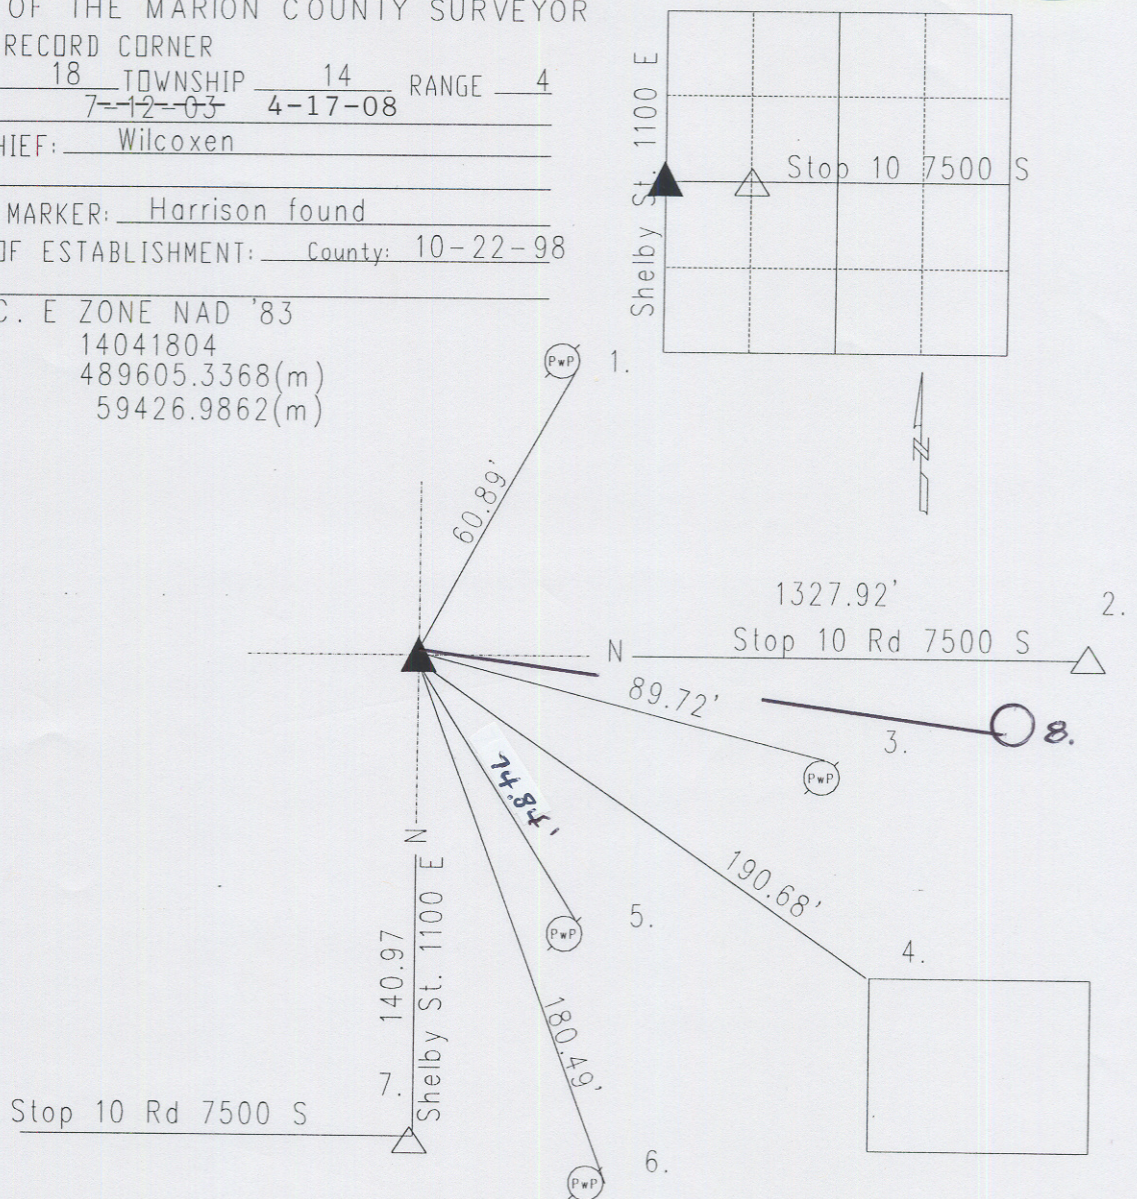

Original post set 1820 by Hendricks with witnesses: 6" ironwood N 3 W 27 links; 12" beech S 67 E 34 links per Marion County Atlas pg. 9. Hosbrook 9-27-1854 called large rock with witness: 16" beech S 26 1/2 E 11 links per Perry Township Legal Survey Book pg. 30. Wilcoxon 8-27-82 called railroad spike set. Greene 9-15-88 called same. Wilcoxon 5-8-96 called same. Excavated by Kiste 10-18-96 Harrison set. Re-tied 10-22-98 by Ksite. Re-tied 7-12-03 by Wilcoxon. 14041804

REF.	DISTANCE	DESCRIPTION
1.	60.89'	PK nail SE PwP no# 18"up
2.	1327.92'	Due E to QQ corner 3/4" rebar found 6" down
3.	89.72'	PK nail N PwP#138-788 A 15"up
4.	190.68'	NW corner of stucco building
5.	74.84'	PK nail NE pwP#202-788A 30"up
6.	180.49'	PK nail PwP#203-788A 30"up
7.	140.97'	Due S to PK nail found E Q 13-14-3
8.	116.44'	Mag nail w/bw SW side siren pole